

## MMX™ Series Intelligent Fire Alarm & Network System



MMX-BBX-FXMNSR

BB-5014R

### Description

Secutron's MMX™ Series Network Fire Alarm Control Units offer modular components to meet a wide variety of applications. Designed for peer-to-peer network communications, the MMX Series allows for a maximum of 63 nodes, while providing reliability, flexibility and expandability.

The MMX Series is a powerful system capable of providing network control, multi-channel voice evacuation and two-way fire fighter communications over a single pair of wires or fiber-optic cable. Each base unit consists of one intelligent signaling line circuit (SLC) capable of supporting 99 analog sensors and 99 addressable modules. In addition the base unit also consists of 4 Style Z/Y (Class A/B) Notification Appliance Circuits rated at 1.7 Amps each and a large back-lit alphanumeric LCD display.

The audio control provides a multi-channel distributed audio system that allows for efficient emergency paging, evacuation signaling and fire fighters' telephone communication. Each audio card cage supports a maximum of 4 QAA style amplifiers for a maximum of 180 watts per cabinet.

Secutron's MMX Series provides a new level of expansion and flexibility by providing support for BACnet, Boolean logic, and real time 3D graphic monitoring and control. In addition the system supports three configuration files which allows for the system to be easily configured without taking the control units offline.

The modular design allows for site specific customization and the ability to meet local and national requirements.

### Features

#### Fire Alarm Control

- One expandable to seventeen Intelligent Signaling Line Circuits (SLC)
- Each SLC is capable of supporting 99 Analog Sensors and 99 Addressable Modules which can be wired in Style 6 or 7 (Class A) or Style 4 (Class B)
- Four Style Z/Y (Class A/B) Notification Appliance Circuits rated at 1.7 Amps each
- Supports both 80 character and 960 character back-lit LCD displays with user friendly menu
- Supported languages: English, French, Arabic\* and Hebrew\* (\*960 character back-lit LCD display only)
- Correlatable Switch Inputs which allows for multi-functional outputs
- Four Alarm Queues with selector switches and LEDs for Alarm, Supervisory, Monitor and Trouble
- RS-232 output for remote system printer or CRT
- Two Event History Logs comprised of a 6000 Alarm History Log and a 6000 Event Log for all events
- Built-in BACnet support
- System can be configured without taking the control unit offline
- Supports three configuration files (current, previous and next configuration) with "hot swap" support
- Real time 3D graphical monitoring and control using Open Graphic Navigator™
- Supports Boolean logic functions
- Built-in Ethernet port
- Remote diagnostics via a built-in web server
- UL listed for Smoke Control (UUKL)

#### Audio Control

- Multi-channel operation
- Distributed audio
- 5 hard wire fire fighter telephone channels that can be expanded with intelligent fire phone modules
- 25 or 70 volt system
- Multiple amplifier sizes
- Max. of 180 watts per Integrated Fire & Audio control unit
- Supports up to two 360 watt audio expansion cabinets for a total of 900 watts of audio power per node

#### Network Features

- Up to 63 nodes
- Peer-to-peer network communications
- Fully integrated digital network audio and control over a single pair of copper wire or fiber optic cable
- Supports over 3,000 points per node
- Supports over 200,000 points on a single network
- Remote diagnostics via built in web server and standard Ethernet port in every node
- Style 4 (Class B) or Style 6 or 7 (Class A) wiring configuration
- Proprietary Arcnet Network Communications protocol



S6619



S6619



7165-1656:0132

NYC  
Fire Dept.



APPROVED

## MMX Series Integrated Fire and Audio Control Units



**MMX-2009-12NDS Large Network Main Control Unit**  
 The MMX-2009-12NDS Large Network Main Control Unit consists of a base fire alarm control unit with one isolated intelligent Signaling Line Circuit (SLC) Style 4, 6 or 7, Four Style Z/Y (Class A/B) NAC circuits, a 4 line by 20 character LCD display and a 12 Amp power supply. The MMX-2009-12NDS has space to mount the FNC-2000 Fire Network Controller Module, ANC-5000 Audio Network Controller Module, TNC-5000 Telephone Network Controller Module and provision to mount up to 4 adder modules. The MMX-2009-12NDS mounts in a BB-5000 Series enclosure and supports Audio Lobby Control modules, Fire Fighter's Lobby Control modules and Internal Annunciator/Programmable modules.




**ECX-0012 Expander Chassis**  
 The ECX-0012 Expander Chassis for the MMX-2009-12NDS supports up to 12 adder modules and has space for 2 internal annunciator modules. The ECX-0012 mounts in a BB-5000 Series enclosure.



**BB-5008/BB-5014 Lobby Enclosures**  
 The BB-5008 and BB-5014 lobby enclosures support the MMX-2009-12NDS Network Lobby Control chassis and provide space for internal lobby control modules. The cabinets hold up to 24 AH batteries. The door and chassis hardware are ordered separately.

**BB-5008 Dimensions:** 36"H x 30"W x 7"D  
**BB-5014 Dimensions:** 60"H x 30"W x 7"D



**MMX-2000MNS Main Network Board**  
 The MMX-2000MNS main network board includes one intelligent Signaling Line Circuit (SLC) and Four Style Z/Y (Class A/B) NAC circuits. The MMX-2000MNS has provisions to mount up to 9 internal adder modules and mounts in the MMX-BBX-FXMNS enclosure.



**QMB-5000N Integrated Audio Network Chassis**  
 The QMB-5000N includes the audio and telephone control which consists of an audio card cage designed for mounting the ANC-5000 Audio Network Controller Module, TNC-5000 Telephone Network Controller Module and up to four QAA style audio amplifiers. The QMB-5000N connects to the MMX-2000MNS main board and mounts in the MMX-BBX-FXMNS enclosures. The QMB-5000N supports audio expansion with connection to up to two MMX-QBB-5001 Audio Cabinets. Each MMX-QBB-5001 can support a maximum 360 watts.

### Electrical Specifications

Fire Alarm Primary Input Power	120V 60Hz / 240V, 50Hz 4 Amps / 2 Amp (primary)
Power Supply Ratings	12 Amps. max. (secondary)
For NAC Circuits	24VDC unfiltered, 10 Amps. max.
Battery Type	24VDC, Gel-Cell/Sealed Lead-Acid
Battery Charging Capability	17-65 AH batteries
Audio Primary Input Power (QPS-5000N)	120 VAC, 60Hz / 240 VAC, 50Hz 12 Amps

## MMX Series Integrated Fire and Audio Control Units



### DSPL-420 Main Display Module

The DSPL-420 Main Display Module provides a 4 line by 20 character backlit LCD display, Common Control buttons and Four Status Queues with selector switches and LEDs for Alarm, Supervisory, Trouble and Monitor. The DSPL-420 occupies one display position in the MMX-BBX-FXMNSR enclosure.



### DSPL-2440 Graphical Main Display Module

The DSPL-2440 Graphical Main Display Module provides a 24 line x 40 character backlit LCD display, Common Controls buttons and Four Status Queues with selector switches and LEDs for Alarm, Supervisory, Trouble and Monitor. The DSPL-2440 occupies one display position in the MMX-BBX-FXMNSR enclosure.



### QMP-5101NV Network Master Paging Control Module

The QMP-5101NV Network Master Paging Control Module includes the paging microphone and common control indicators. The QMP-5101NV allows for all call paging or selective paging with the QAZT-5302DS Zoned Paging and Telephone Selector Modules. The QMP-5101NV is a vertical mount unit that mounts in the MMX-BBX-FXMNSR enclosure.



### QMT-5302NV Network master Fire fighters' Telephone Control Module

The QMT-5302NV includes the Master Telephone Handset and common control indicators. The QMT-5302NV supports the QAZT-5302DS Paging and Telephone selector modules. The QMT-5302NV is a vertical mount unit that mounts in the MMX-BBX-FXMNSR enclosure.




### MMX-BBX-FXMNSR Enclosure

The MMX-BBX-FXMNSR enclosure supports the MMX-2000MNS Network main board, a DSPL-420 or DSPL-2440 Main LCD display, a QMB-5000N audio card cage, a QMP-5101NV Master Paging Microphone and a QMT-5302NV Master Telephone Handset. In addition the enclosure provides space for additional external modules and internal lobby control modules. The MMX-BBX-FXMNSR holds up to 40 AH batteries and includes a red door.

**MMX-BBX-FXMNSR Dimensions:** 61.5"H x 20"W x 9"D


## Power Supply Expansion

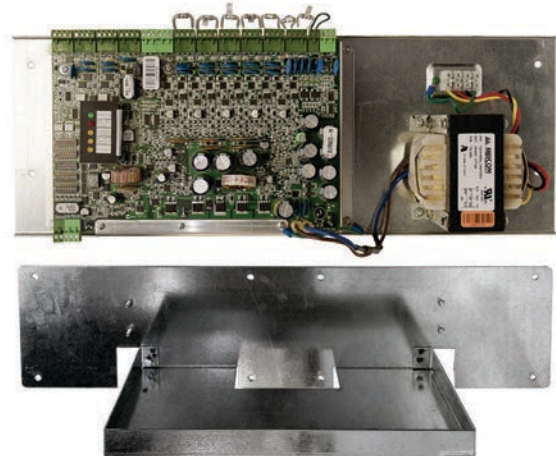

### INX-10AC Internal Booster Power Supply Module


The INX-10AC is an Intelligent Booster Power Supply that extends the power capabilities of existing notification appliance circuits as well as provide power for other ancillary devices. The INX-10AC has 10 amps of power and mounts inside the BB-5014 enclosure.

## Fire Network Controller Modules

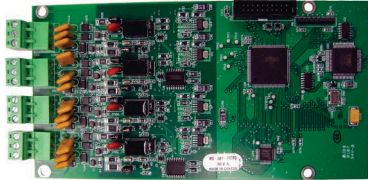

### FNC-2000 Fire Network Controller Module


The FNC-2000 provides network capability to the MMX-2009-12NDS. One Fire Network Controller Module is required per network node. In addition the FNC-2000 provides an interface for adding an optional FOM-2000-SP Fiber Optic Network Adder Module. The FNC-2000 mounts in the MMX-2009-12NDS main chassis.



### FOM-2000-SP Fiber Optic Network Adder Module


The FOM-2000-SP Fiber Optic Network Adder Module allows for the use of fiber optic cabling on the MMX-2009-12NDS. It seamlessly connects to the interface on the FNC-2000 Fire Alarm Network Controller Module.

## Adder Loop Controller Modules

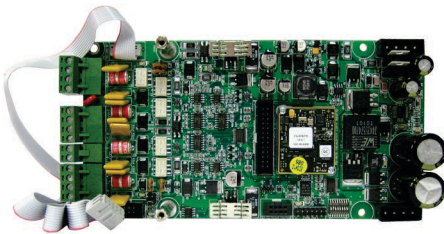

### ALCN-792M Quad Loop Controller Module


The ALCN-792M Quad Loop Controller Module provides two Signaling Line Circuits (SLC) to the MMX system consisting of 99 Analog Sensors and 99 Addressable Modules per loop. The ALCN-792M can be expanded with the use of the ALCN-792D Daughter Board Module. The ALCN-792M occupies one module slot.

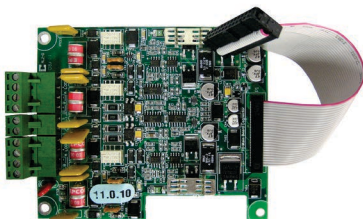

### ALCN-792D Daughter board for Quad Loop Controller Module


The ALCN-792D Daughter Board provides an additional two SLC when connected to the ALCN-792M Quad Loop Controller Module. The daughter board mounts on top of the ALCN-792M.

## Adder Hardware Modules

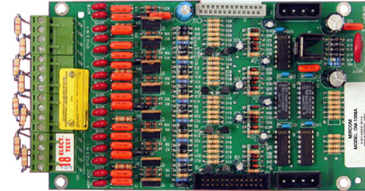


### DM-1008A Eight Initiating Circuit Module

The DM-1008A provides 8 Style B (Class B) or 4 Style D (Class A) Initiating Circuits configurable for Alarm, Supervisory or Trouble zones. The DM-1008A occupies one module slot.

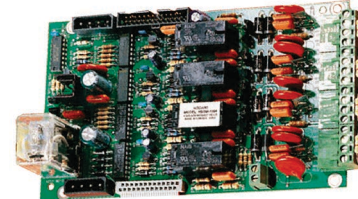

### SGM-1004A Four Notification Appliance Circuit Module


The SGM-1004A provides 4 Style Z/Y (Class A/B) Notification Appliance Circuits configurable as Silenceable or Non-Silenceable. Each NAC circuit is rated at 1.7 Amps and has individual signal silence inputs (jumper selectable). The SGM-1004A occupies one module slot.



### RM-1008A Eight Relay Circuit Module

The RM-1008A provides the system with eight individual configurable relays per module. Each relay provides one Form C contact rated at 28 VDC @1 Amp (resistive load) as well as a Green LED to indicate that the relay is active. The RM-1008A occupies one module slot.

## Adder Auxiliary Modules



### UDACT-300A Digital Alarm Communicator Module


The UDACT-300A Digital Communicator allows the system to transmit addressable point information to a central station. The UDACT-300A occupies one module slot.



### PR-300 Polarity Reversal/City Tie Module

The PR-300 Polarity Reversal/City Tie Module provides the system with a supervised City Tie (24 VDC/200 mA max.) and Polarity Reversal connection (24 VDC (open circuit), 8 mA max. (shorted)). The PR-300 occupies one module slot.

## Remote LCD Annunciators

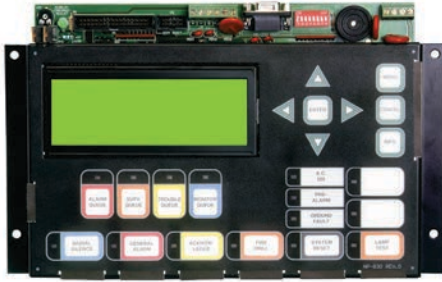

### RAXN-LCD Remote LCD Annunciator


The RAXN-LCD Remote LCD Annunciator is equipped with a 4 line x 20 character back-lit alphanumeric LCD display that provides an exact replica of the main MMX fire alarm control unit display. The RAXN-LCD occupies one display position in the MMX-BB-1000 or BB-5000 Series enclosures.



### RAXN-LCDG Remote Graphic LCD Annunciator


The RAXN-LCDG Remote Graphic LCD Annunciator equipped with a 24 line x 40 character back-lit graphical LCD display that is used to display 9 events per page. Each event is displayed over 2 lines with 40 characters per line allowing emergency information to be displayed in easy to read format. The RAXN-LCDG occupies one display position in the MMX-BB-1000 or BB-5000 Series enclosures.

## Remote LED Annunciators

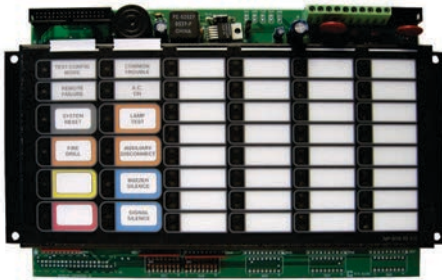

### RAM-1032TZDS Main Remote LED Annunciator


The RAM-1032TZDS Main Remote LED Annunciator provides common annunciator functions and 32 points of LED annunciation. The RAM-1032TZDS has indicators for A.C. On, Common Trouble and Signal Silence and controls for System Reset, Lamp Test, Fire Drill, Buzzer Silence and Signal Silence. The RAM-1032TZDS occupies one display position in the MMX-BB-1000 or BB-5000 Series enclosures.

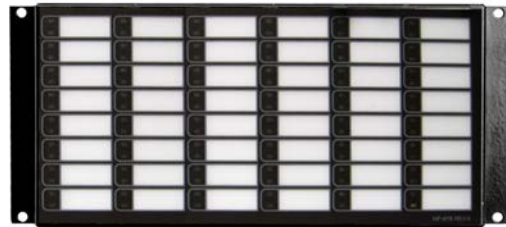

### RAX-1048TZDS Programmable LED Annunciator Module


The RAX-1048TZDS Programmable LED Annunciator Module provides 48 programmable bi-colored LEDs. The RAX-1048TZDS connects to the main control unit or either the RAXN-LCD or RAM-1032TZDS when mounted remotely. The RAX-1048TZDS occupies one display position in the MMX-BB-1000 or BB-5000 Series enclosures.

## Graphic Annunciator Driver Modules

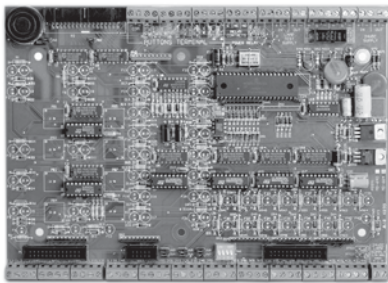

### MGD-32 Master Graphic Driver Module


The MGD-32 Master Graphic Driver Module provides common control inputs for the common control switches such as System Reset, Signal Silence, Auxiliary Disconnect, Fire Drill, Lamp Test, Acknowledge and General Alarm. The MGD-32 can also drive up to 32 supervised outputs. These output points are capable of driving LEDs or incandescent lamps. The MGD-32 mounts in a graphic annunciator wallbox or in the BB-5000 Series enclosures. An external power supply is required for incandescent lamps and lamp test.

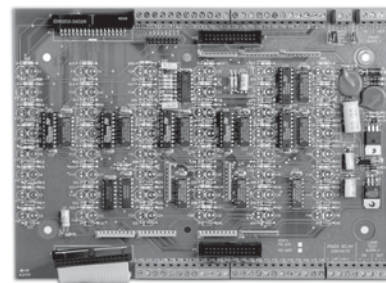

### AGD-048 Adder Graphic Driver Module


The AGD-048 Adder Graphic Driver Module can be used with the MGD-32 to support an additional 48 supervised outputs. The AGD-048 mounts in a graphic annunciator wallbox or in the BB-5000 Series enclosures.

## Programmable Modules

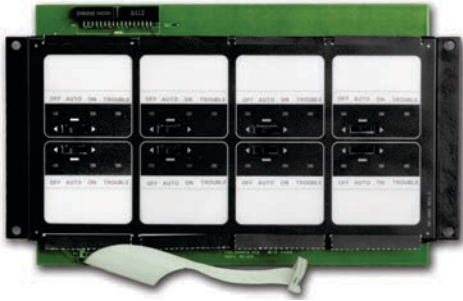

### FDX-008 Fan Damper Control Module

The FDX-008 Fan Damper Control Module provides individually programmed circuits which can be used for fan or damper control. The FDX-008 connects to the main control unit or the RAXN-LCD and occupies one display position in the MMX-BB-1000 or BB-5000 Series enclosure.

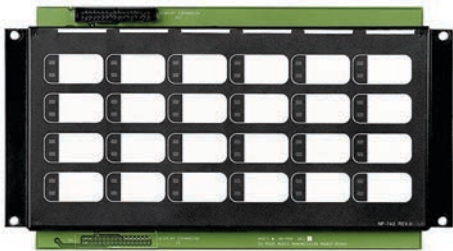

### IPS-2424DS Programmable Input Switches Module

The IPS-2424DS provides 24 programmable switches that can be configured for ancillary functions such as zone bypass or added common control functions. The IPS-2424DS connects to main control unit or the RAXN-LCD when mounted remotely. The IPS-2424DS occupies one display position in the MMX-BB-1000 or BB-5000 Series enclosures.

## Mounting Brackets



### M500-BK9 Module Mounting Bracket

The M500-BK9 Module Mounting Bracket mounts inside the BB-5000 Series enclosures and provides space to mount up to nine M500 style intelligent modules.



### M500-BK2 Module Mounting Bracket

The M500-BK2 Module Mounting Bracket mounts inside the MMX-BBX-FXMNS enclosure and provides space to mount up to two M500 style intelligent modules.

## Graphics Software



### Open Graphic Navigator (OpenGN)

The Open Graphic Navigator (OpenGN) software is an advanced fire alarm management and warning system that provides building ready monitoring, control and software management solutions that allows a user to monitor remote sites from multiple operator workstations located anywhere in the world.

The OpenGN software is available in two versions: Network (OPENGN-ENT) and Non-Network (OPENGN-MINI) for use with the Secutron MMX Series Intelligent Fire Alarm Control Units.

### Dimensions for Annunciator Module Enclosures

Model	Dimensions
MMX-BB-1001R	9"H x 12.75"W x 1.2"D
MMX-BB-1002R	18"H x 12.75"W x 1.2"D
MMX-BB-1003R	26.4"H x 12.75"W x 1.2"D
MMX-BB-1008R	33"H x 22.5"W x 1.25"D
MMX-BB-1012R	45"H x 22.5"W x 1.25"D

## MMX Series Audio and Telephone Network Controller Modules



### ANC-5000 Audio Network Controller Module

The ANC-5000 provides audio microphone control on the network system. The ANC-5000 mounts on a plate in the MMX-2009-12NDS or QMB-5000N.



### TNC-5000 Telephone Network Controller Module

The TNC-5000 provides five hardwired telephone circuits for the local floor control unit with the first circuit configurable for the master telephone handset. The TNC-5000 mounts in the MMX-2009-12NDS or QMB-5000N.

## Paging & Telephone Control Modules




### QMP-5101N Network Master Paging Control Module

The QMP-5101N Network Master Paging Control Module includes the paging microphone and common control indicators. The QMP-5101N allows for all call paging or selective paging with the QAZT-5302DS Zoned Paging and Telephone Selector Modules. The QMP-5101N occupies one module space in the BB-5000 Series enclosures.



### QMT-5302N Network Master Firefighters' Telephone Control Module


The QMT-5302N includes the Master Telephone Handset and common control indicators. The QMT-5302N supports the QAZT-5302DS Paging and Telephone selector modules. The QMT-5302N occupies one module space in the BB-5000 Series enclosures.

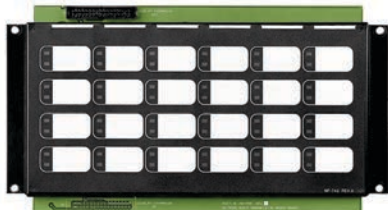

### QAZT-5302DS Zoned Paging/Telephone Selector Module


The QAZT-5302DS Zoned Paging and Telephone Selector Module includes 24 zone selector switches and LEDs. The QAZT-5302DS is used with the QMP-5101N Network Master Paging Control module or QMT-5302 Network Master Firefighters' Telephone module. Slide-in labels are provided to label the selector zones. The QAZT-5302DS occupies one module space in the MMX-BB-1000 or BB-5000 Series enclosures.

## Audio Expansion

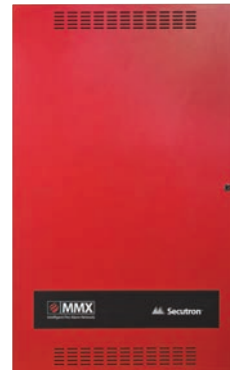


### MMX-QBB-5001R Audio Backbox

The MMX-QBB-5001R holds one QMB-5000B Audio Motherboard and Card Cage, one QPS-5000N Audio Power Supply, one QBC-5000N Audio Battery Charger and up to 40 Ah batteries.



### QMB-5000B Audio Motherboard and Card Cage

The QMB-5000B supports 7 QAA style audio amplifiers. The QMB-5000B requires one QPS-5000N Audio Power Supply and one QBC-5000N Audio Battery Charger and mounts in the MMX-QBB-5001 backbox.



### QPS-5000N Audio Power Supply

The QPS-5000N supports up to 360 watts and mounts in the MMX-QBB-5001R Audio backbox.




### QBC-5000N Audio Battery Charger

The QBC-5000N will charge up to 65 Ah batteries and mounts in MMX-QBB-5001R Audio Backbox.

*Note: The MMX-QBB-5001 Audio Backbox will hold up to 40 Ah batteries. Larger batteries will require a BC-160 Battery Cabinet.*

## Audio Amplifiers

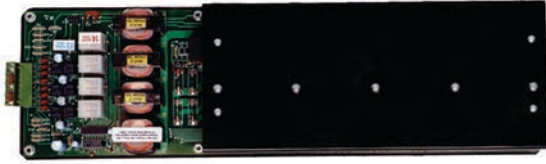

### QAA-5415-70 and QAA-5415-25 Quad 15 Watt Amplifiers

The QAA-5415-70 and QAA-5415-25 consist of four 15 watt supervised paging/speaker circuits which can be wired in Class 'B' (Style 'Y') only. The QAA-5415-70 is a 70 Volt amplifier and the QAA-5415-25 is a 25 Volt amplifier. Both models mount in either the QMB-5000N or QMB-5000B card cage and occupy one amplifier slot.

### QAA-5230S-70/25 Dual 30 Watt Amplifier


The QAA-5230S-70/25 consists of two 25 or 70 Volt 30 watt amplifiers. Each amplifier has two 15 watt supervised speaker outputs which are used for 'A' 'B' speakers per floor and are wired in Class 'B' (Style 'Y') only. The QAA-5230S-70/25 mounts in either the QMB-5000N or QMB-5000B card cage and occupies one amplifier slot.

### QAA-5230-70/25 Dual 30 Watt Amplifier

The QAA-5230-70/25 consists of two 25 or 70 Volt 30 watt supervised paging/speaker circuits which can be wired in Class 'A' (Style 'Z') or Class 'B' (Style 'Y'). The QAA-5230-70/25 mounts in either the QMB-5000N or QMB-5000B card cage and occupies one amplifier slot.

### QAA-5160-70/25 60 Watt Amplifier

The QAA-5160-70/25 consists of one 25 or 70 Volt 60 watt supervised paging/speaker circuit which can be wired in Class 'A' (Style 'Z') or Class 'B' (Style 'Y'). The QAA-5160-70/25 mounts in either the QMB-5000N or QMB-5000B card cage and occupies one amplifier slot.




### QAA-4CLA Class 'A' (Style 'Z') Converter Module

The QAA-4CLA converts each of the four Class 'B' (Style 'Y') outputs on a QAA-5415-70 or QAA-5415-25 Amplifiers to Class 'A' (Style 'Z'). The module attaches to the bottom of the amplifier. One QAA-4CLA is required for each amplifier.


### QAA-4CLAS Class 'A' (Style 'Z') Converter Module

The QAA-4CLAS converts each of the four Class 'B' (Style 'Y') outputs on a QAA-5230S-70/25 Amplifier to Class 'A' (Style 'Z'). The module attaches to the bottom of the amplifier. One QAA-4CLAS is required for each amplifier.


### QAA-5415-70 or QAA-5415-25 Wiring Diagram

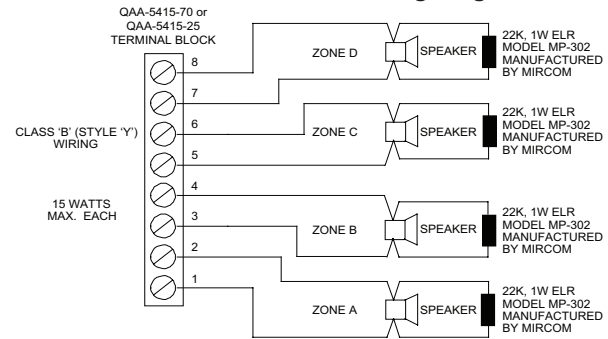


### QAA-5230S-70/25 Wiring Diagram

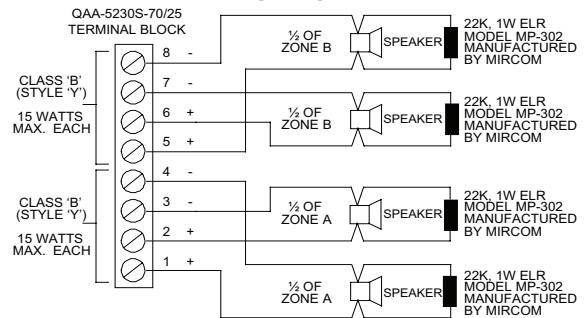


### QAA-5230-70/25 Wiring Diagram

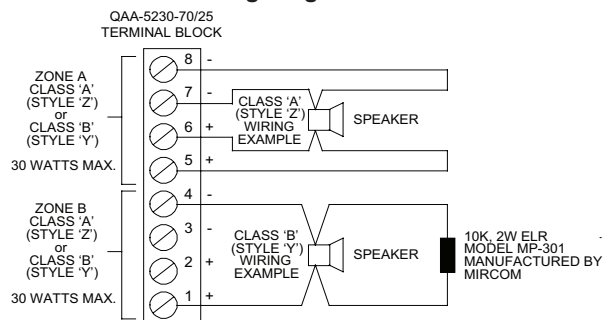

### QAA-5160-70/25 Wiring Diagram

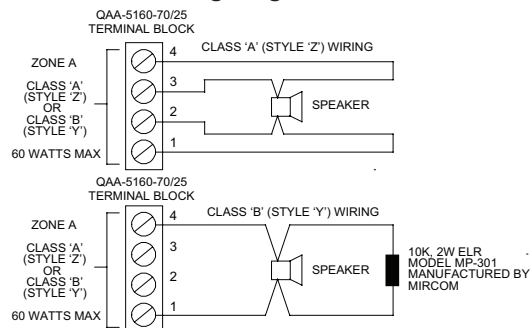


### QAA-4CLA and QAA-4CLAS Connection Diagram

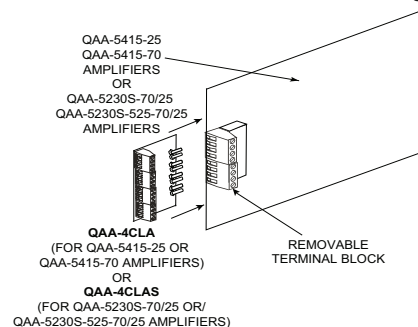



# Typical MMX Series Networked System Configuration with Audio

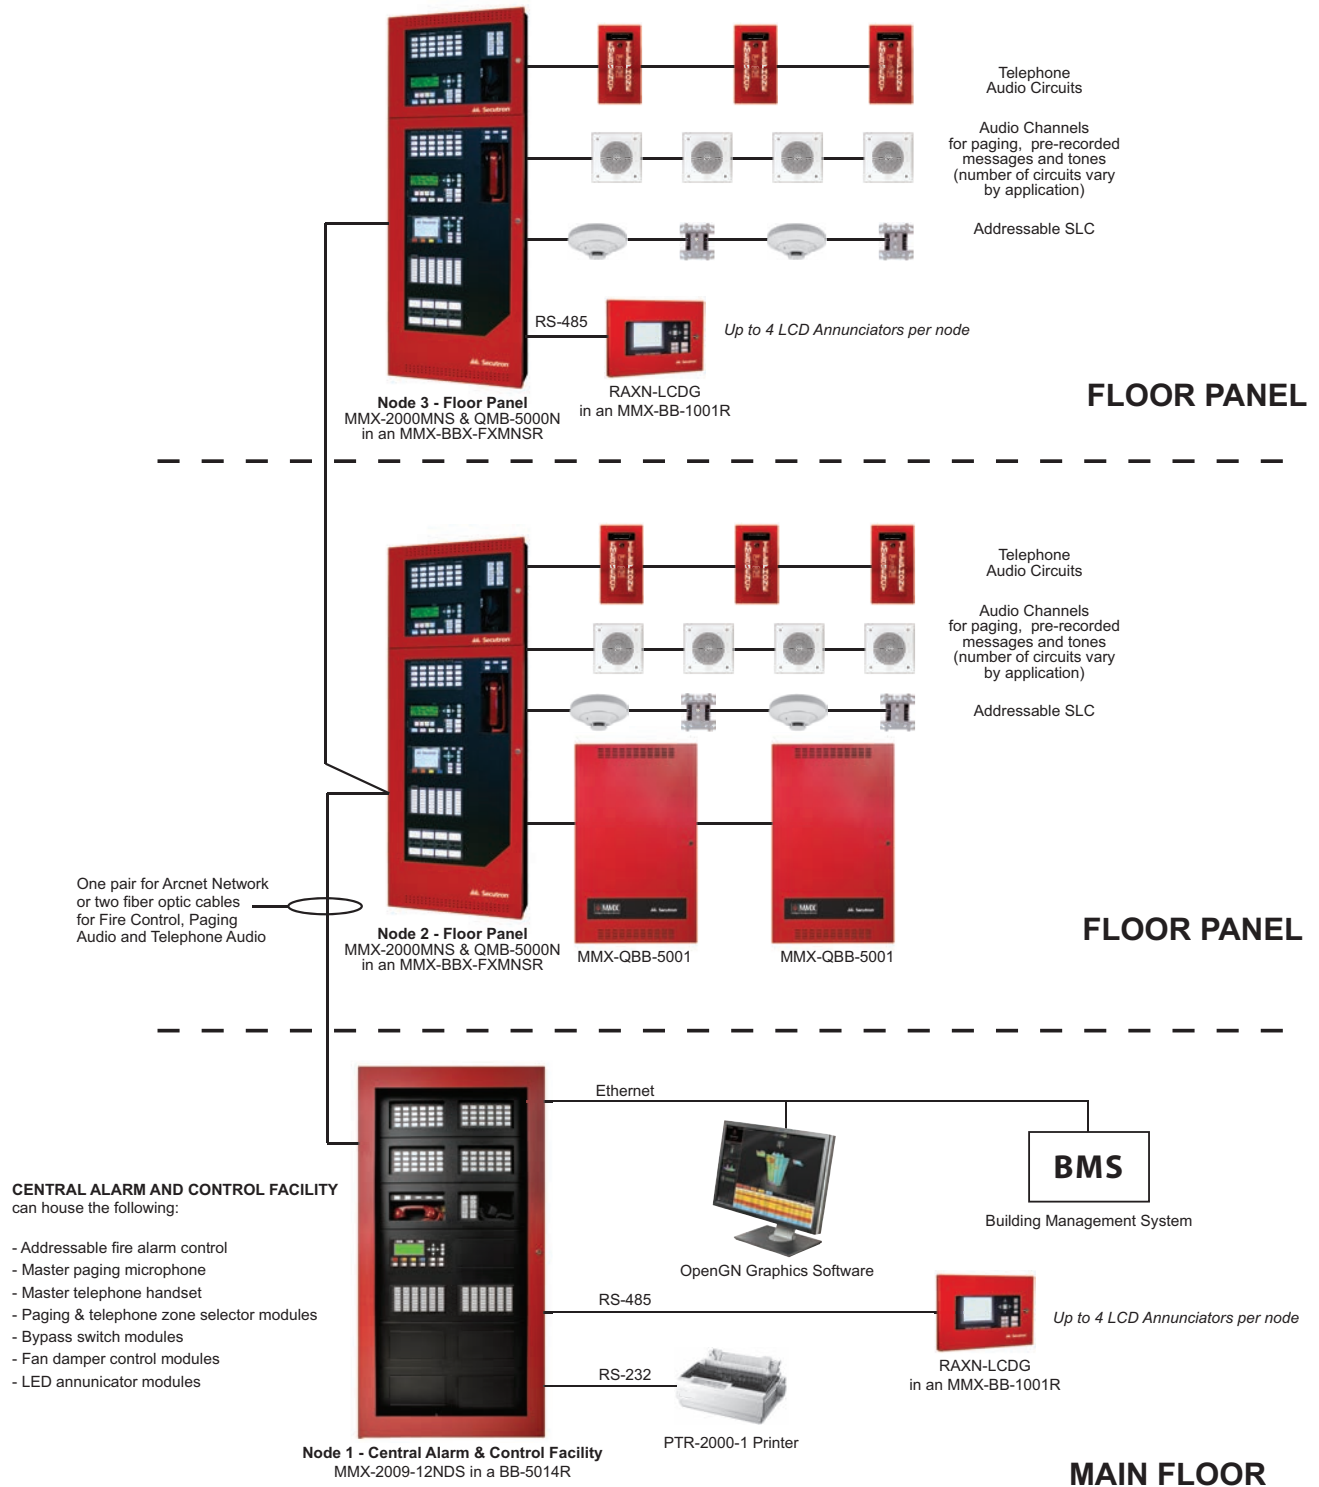

## Current Consumption

Model Number	Description	Standby (Amps)	Alarm (Amps)
<b>Fire Alarm Components</b>			
MMX-2009-12NDS	Large Main Chassis (12 Amp)	0.310	0.733
ALCN-792M	Quad Loop Controller Module	0.130	0.145
ALCN-792M /w ALCN-792D	Quad Loop Controller Module with Daughter Module	0.130	0.145
FNC-2000	Fire Network Controller Module	0.190	0.0190
ANC-5000	Audio Network Controller Module	0.255	0.265
TNC-5000	Telephone Network Controller Module	0.195	0.215
FOM-2000-SP	Fiber Optics Module	0.015	0.015
DM-1008A	8 Initiating Circuit Module	0.080	1 zone active: 0.125 2 zone active: 0.170 4 zone active: 0.275 6 zone active: 0.370 8 zone active: 0.465
SGM-1004A	4 Notification Appliance Circuit Module	0.060	0.258
RM-1008A	8 Relay Circuit Module	0.025	0.150
FDX-008	Fan Damper Control Module	0.015	0.035
DSPL-420	Narrow Display	0.024	0.025
DSPL-2440	Graphic Display	0.029	0.035
UDACT-300A	Dialer Module	0.045	0.120
PR-300	City Tie Module	0.035	0.300
FDS-008	Selection Control Panel for MNS	0.024	0.112
RAX-1048TZDS	Adder Annunciator Chassis	0.022	1 zone active: 0.026 2 zone active: 0.030 3 zone active: 0.035 4 zone active: 0.039 48 zone active: 0.262
RAM-1032TZDS	Adder Annunciator Chassis	0.050	32 zone active: 0.300
AGD-048	Adder Graphic Driver Board	0.035	# of LEDs x 4mA
IPS-2424DS	Programmable Input Switches Module	0.010	0.015
<b>Audio Components</b>			
ANC-5000	Audio Network Controller Module	0.255	0.265
TNC-5000	Telephone Network Controller Module	0.195	0.215
QAA-5160-70/25	1 Zone 60W Amplifier	0.055	0.350
QAA-5230-70/25	2 Zone 30W Amplifier	0.055	0.350
QAA-5230S-70/25	2 Zone 30W Amplifier (split)	0.055	0.350
QAA-5415-70	4 Zone 15W Amplifier, 70V	0.055	0.350
QAA-5415-25	4 Zone 15W Amplifier, 25V	0.055	0.350
QMP-5101N	Master Paging Module	0.004	0.012
QMP-5101NV	Vertical Master Paging Module	0.004	0.012
QMT-5302N	Master Telephone Module	0.003	0.013
QMT-5302NV	Vertical Master Telephone Module	0.003	0.013
QAZT-5302DS	Paging/Telephone Zone Module	0.010	0.015

## Ordering Information

Model	Description
<b>MMX Series Network Lobby Control and Floor Units - Integrated Fire and Audio Systems</b>	
MMX-2009-12NDS	Large Network Main Chassis. Mounts in the BB-5000 series enclosures.
ECX-0012	Expander Chassis for the MMX-2009-12NDS. Mounts in the BB-5000 series enclosures.
MMX-2000MNS	Main Network Board with one SLC loop. Mounts in the MMX-BBX-FXMNSR enclosure.
DSPL-420	4 x 20 Main LCD Display for MMX-2000MNS
DSPL-2440	Graphical Main Display for MMX-2000MNS
QMB-5000N	Integrated Audio Network Control Chassis
PS-2040	Network Fire Alarm and Audio Power Supply
<b>Enclosures</b>	
BB-5008	Lobby Control Wallbox Enclosure. Supports 8 Module Footprints.
MMX-DOX-5008MR	Red Metal Door for BB-5008
CCH-5008	Custom Mounting Kit for BB-5008. One required per BB-5008.
BB-5014	Lobby Control Wallbox Enclosure. Supports 14 Module Footprints.
MMX-DOX-5014MR	Red Metal Door for BB-5014
CCH-5014	Custom Mounting Kit for BB-5014. One required per BB-5014.
MMX-BBX-FXMNSR	Black backbox enclosure with red doors for MMX-2000MNS
<b>Adder Loop Controller Modules</b>	
ALCN-792M	Network Quad Loop Controller Module
ALCN-792D	Daughter board for ALC-792M Quad Loop Controller Module
<b>Adder Hardware Modules</b>	
DM-1008A	Eight Class B (Style B) or 4 Class A (Style D) Initiating Circuit Module
SGM-1004A	Four Class A/B (Style Z/Y) Notification Appliance Circuit Module (Rated at 1.7 Amps per circuit)
RM-1008A	Eight Relay Circuit Module c/w eight form C relays (Rated for 28 VDC @ 1 Amp max. per relay)
<b>Adder Auxiliary Modules</b>	
UDACT-300A	Digital Alarm Communicator Transmitter/Dialer Module
PR-300	Polarity Reversal and City Tie Module
<b>Programmable Modules</b>	
IPS-2424DS	Programmable Input Switches Module c/w 24 selector switches and 24 bi-coloured LEDs
FDX-008	Fan Damper Control Module c/w 8 programmable switches
<b>Power Module</b>	
INX-10AC	Internal Booster Power Supply Module
<b>Remote Annunciators</b>	
RAXN-LCD	Remote LCD Annunciator
RAXN-LCDG	Remote Graphic LCD Annunciator
RAM-1032TZDS	Main Remote LED Annunciator c/w 32 Bi-Colored LEDs
RAX-1048TZDS	Adder Annunciator Chassis c/w 48 Bi-Colored LEDs

<b>Graphic Annunciator Driver Modules</b>	
MGD-32	Main Graphic Driver Module c/w 32 Supervised Outputs
AGD-048	Adder Graphic Driver Module c/w 48 Supervised Outputs
<b>Network Controller Modules</b>	
FNC-2000	Fire Network Controller Module
FOM-2000-SP	Fiber Optic Network Adder Module
ANC-5000	Audio Network Controller Module
TNC-5000	Telephone Network Controller Module
<b>Paging and Telephone Control Modules</b>	
QMP-5101NV	Master Network Paging Control Module for MMX-FXMNS, Vertical Mount. For use in MMX-BBX-FXMNS.
QMT-5302NV	Master Network Telephone Module for MMX-FXMNS, Vertical Mount. For use in MMX-BBX-FXMNS.
QMP-5101N	Master Network Paging Control Module
QMT-5302N	Master Network Telephone Control Module
QAZT-5302DS	Paging and Telephone Selector Panel
<b>Audio Amplifiers</b>	
QAA-5415-70	70 Volt Quad 15 Watt Amplifier
QAA-5415-25	25 Volt Quad 15 Watt Amplifier
QAA-4CLA	Class 'A' (Style 'Z') Converter Module for QAA-5415-25 and QAA-5415-70 Amplifiers
QAA-5230S-70/25	25 or 70 Volt Dual 30 Watt Amplifier split 'A' 'B' circuits per floor
QAA-4CLAS	Class 'A' (Style 'Z') Converter Module for QAA-5230S-70/25 and QAA-5230S-525-70/25
QAA-5230-70/25	25 or 70 Volt Dual 30 Watt Amplifier
QAA-5160-70/25	25 or 70 Volt 60 Watt Amplifier
<b>Audio Expansion Components</b>	
QMB-5000B	Audio Motherboard and Card Cage
QPS-5000N	Audio Power Supply
QBC-5000N	Audio Battery Charger
MMX-QBB-5001R	Audio Back box
<b>Enclosures for Remote Annunciators / Programmable Modules</b>	
MMX-BB-1001R	Remote Annunciator/Programmable Module Enclosure Houses one module.
MMX-BB-1002R	Remote Annunciator/Programmable Module Enclosure Houses two modules.
MMX-BB-1003R	Remote Annunciator/Programmable Module Enclosure Houses three modules.
MMX-BB-1008R	Remote Annunciator/Programmable Module Enclosure Houses eight modules.
MMX-BB-1012R	Remote Annunciator/Programmable Module Enclosure Houses twelve modules.
<b>Graphics Software</b>	
OPENGN-MINI	Open Graphic Navigator Software, Mini Edition for standalone MMX Series Systems
OPENGN-ENT	Open Graphic Navigator Software, Enterprise Edition for MMX Series Network Systems

This Page Left Intentionally Blank